


## Chord Cluster Collection

Installation and Product Guide  
30", 36", 40", 48", and 52" Pendants

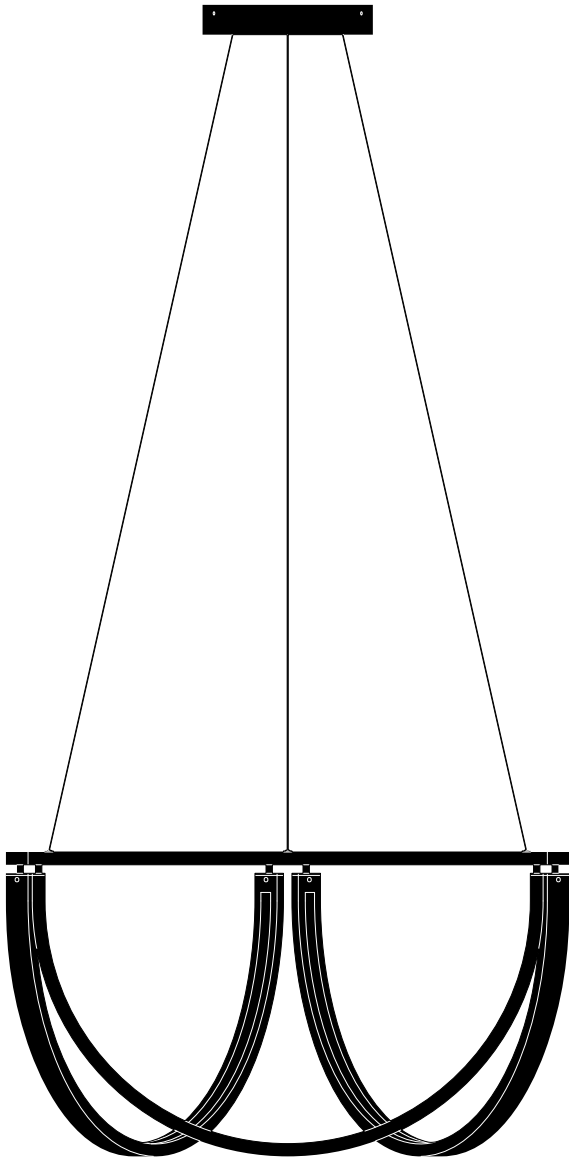

### CAUTION:

Electric shock risk. Turn off electrical power at breaker before beginning installation. We recommend this product be installed by a qualified electrician only.

## INSTALLATION INSTRUCTIONS

**(1)** Attach **Ceiling Plate** to ceiling **Junction Box** with junction box screws.


**(2)** Remove Red+ and Black- **Cable Insulators** from cables and save for step 3 (keep note of colors through install). Feed the three **Suspension Cables** through the holes in the bottom of the **Canopy** and into the **Cable Grippers** in the **Ceiling Plate**. Continue feeding Suspension Cables through the cable grippers until the fixture is level and at the desired height. Tighten the cable gripper lock nuts after final adjustments. See Diagram 'A' box '1' below for more detail

**(3)** Slide the Red+ and Black- **Cable Insulators** along the excess **Conductive Cables** until they reach the top of the cable grippers. Ensure the cable insulators cover the conductive cables so they don't touch the metal interior of the canopy or ceiling plate. Trim cables to appropriate length. See Diagram 'A' box '2' below for more detail.

**(4)** Connect the **Red+ Conductive Suspension Cable** to the Red+ output cable on the LED driver. Connect the **Black- Conductive Suspension Cable** to the Black- driver output. Connect the driver input cables to the line voltage input.

**(5)** Slide the **Canopy** up the **Suspension Cables** to the ceiling and secure it using the three **Set Screws**. See Diagram 'A' box '3' below for more detail.

Diagram A

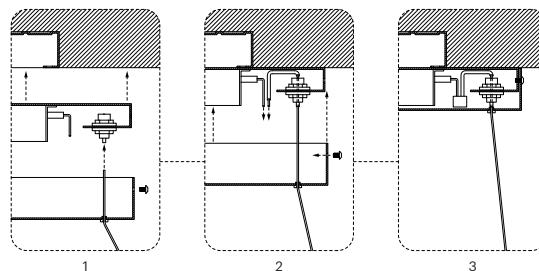


See back of instruction book for installation photographs



Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz



## INSTALLATION DIAGRAMS

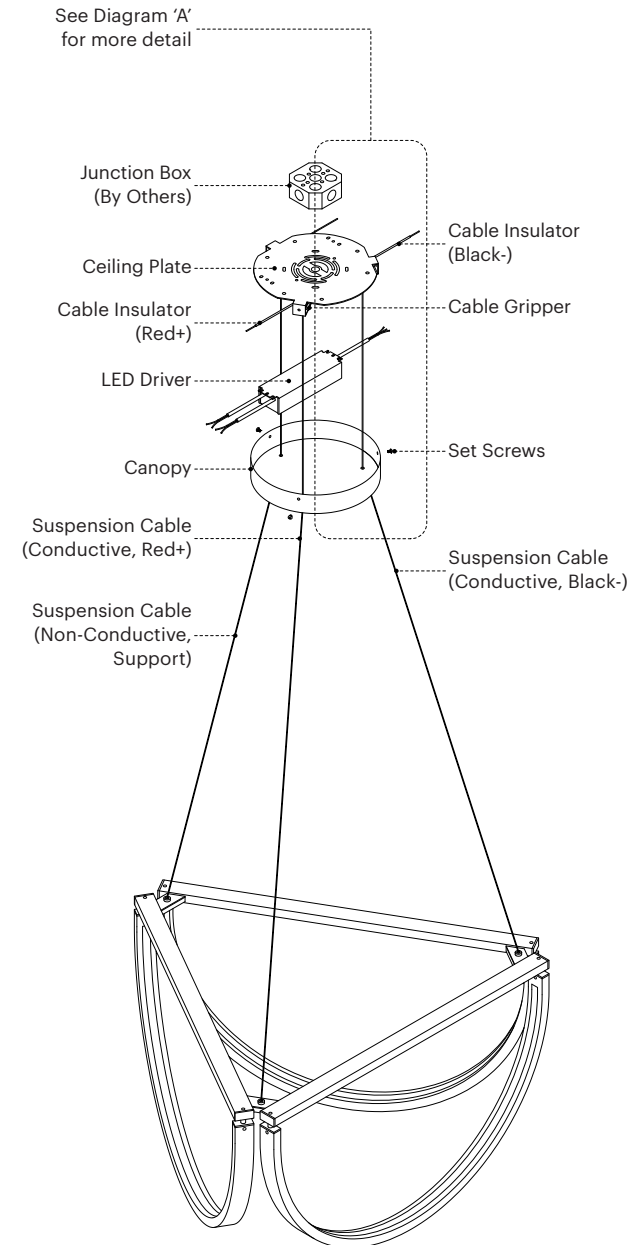

DIMMER COMPATIBILITY

**LUTRON:**  
CASETA WIRELESS PD-6WCL  
DIVA CL DVCL-153P-WH  
DIVA ELV DVELV-303P  
DIVA 0-10V DVSTV  
DIVA 0-10V DVTV  
HOME WORKS HQRD-6A  
HOME WORKS HQRD-6NA  
MRF2-6ELV-120-WH  
MAESTRO MRF2-6ELV-120-WH  
MAESTRO RF RRA-6D  
MAESTRO RF RRA-6NA  
MAESTRO RF RRA-6ND  
MAESTRO MAELV-600  
MAESTRO MSCELV-600M  
MAESTRO CL MACL-153MH  
MAESTRO IR MIRELV-600  
MAESTRO WIRELESS MRF2-6ELV-120  
NOVA T NTELV-600-WH  
NOVA NVELV-600-WH  
NOVA T NTELV-300  
SKYLARK SELV-600-WH  
SKYLARK CONTOUR CTELV-303P  
VIERTI VTELV-600-XXX


**LEVITON:**  
6615  
6672  
6674/IPLO6  
IPEO4  
IPIO6  
VP106  
VPEO4  
VPMO6  
VREO4  
VRM10  
IP710

**CONT.**  
DS710  
DD710


**CRESTRON:**  
CLW-DIMSWEX-P  
P-DIMEX  
GLX-DIM6  
GLXX-2DIM8  
CLW-DELVEX-E  
CLW-DELVEX-P  
CLX-2DIMFLV8  
DIN-4DIMFLV4  
CLS-EXP-DIMFLV  
GLX-DIMFLV8  
SELV-300P  
CLS-C6  
CLS-C6M  
CLS-C6EX  
CLS-C6MEX  
CLS-C6MRF  
CLS-C6RF  
CLS-EXP-DIM  
CLS-EXP-DIMU  
CLX-1DIM4  
CLX-1DIM8  
CLX-2DIM2  
CLX-2DIM8  
CLX-1DELV4  
DIN-1DIM4  
DIN-1DIMU4  
CLW-DIMEX-E  
CLW-DIMEX-P  
CLW-DIMSWEX-E

**FEIT**  
BPMIMSMART/2

INSTALLATION PHOTOGRAPHS

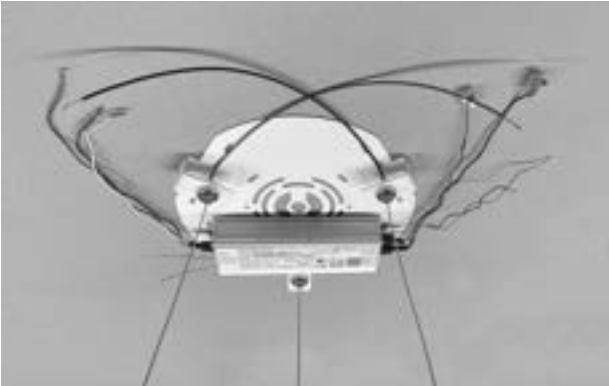

(1) After installing **Ceiling Plate**, feed the three **Suspension Cables** through the holes in the bottom of the **Canopy** and into the **Cable Grippers** in the **Ceiling Plate** until fixture is level and at the desired height. Tighten the cable gripper lock nuts after final adjustments.

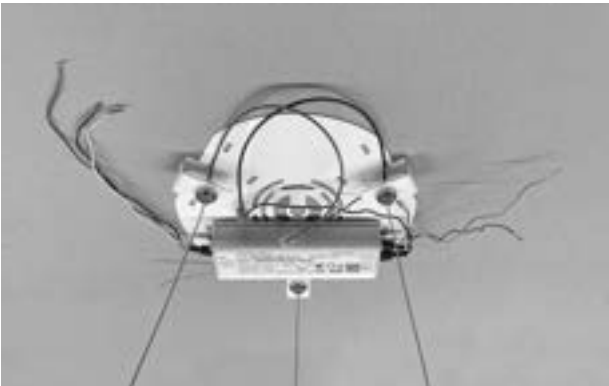

(2) Slide the Red+ and Black- **Cable Insulators** along the excess **Conductive Cables** until they reach the top of the cable grippers. Ensure the cable insulators cover the conductive cables so they don't touch the metal interior of the canopy or ceiling plate. Connect the Red+ and Black- Cable Insulators to the corresponding Red+ and Black- Output wires on the driver. Connect the driver input cables to the line voltage input.

INSTALLATION PHOTOGRAPHS



(3) After connecting wires, slide the **Canopy** up the **Suspension Cables** to the ceiling. Make sure any loose cables or wires are tucked inside the canopy and confirm that the conductive suspension cables are not touching any metal surfaces on the interior. Secure the **Canopy** using **Set Screws** provided.

CARE INSTRUCTIONS

For removing oils from metal surfaces after handling, or for removing moisture, grease, or dirt, wipe or rub lightly with a dry microfiber or cotton cloth.

Do not use any abrasive or acidic household cleaning products on product surfaces.

For the best maintenance of the product, protect against sunlight, heat, or any other natural elements.