


ROUND FLUSH MEDIUM CANOPY

3 POINT SUSPENSION

RFM.3



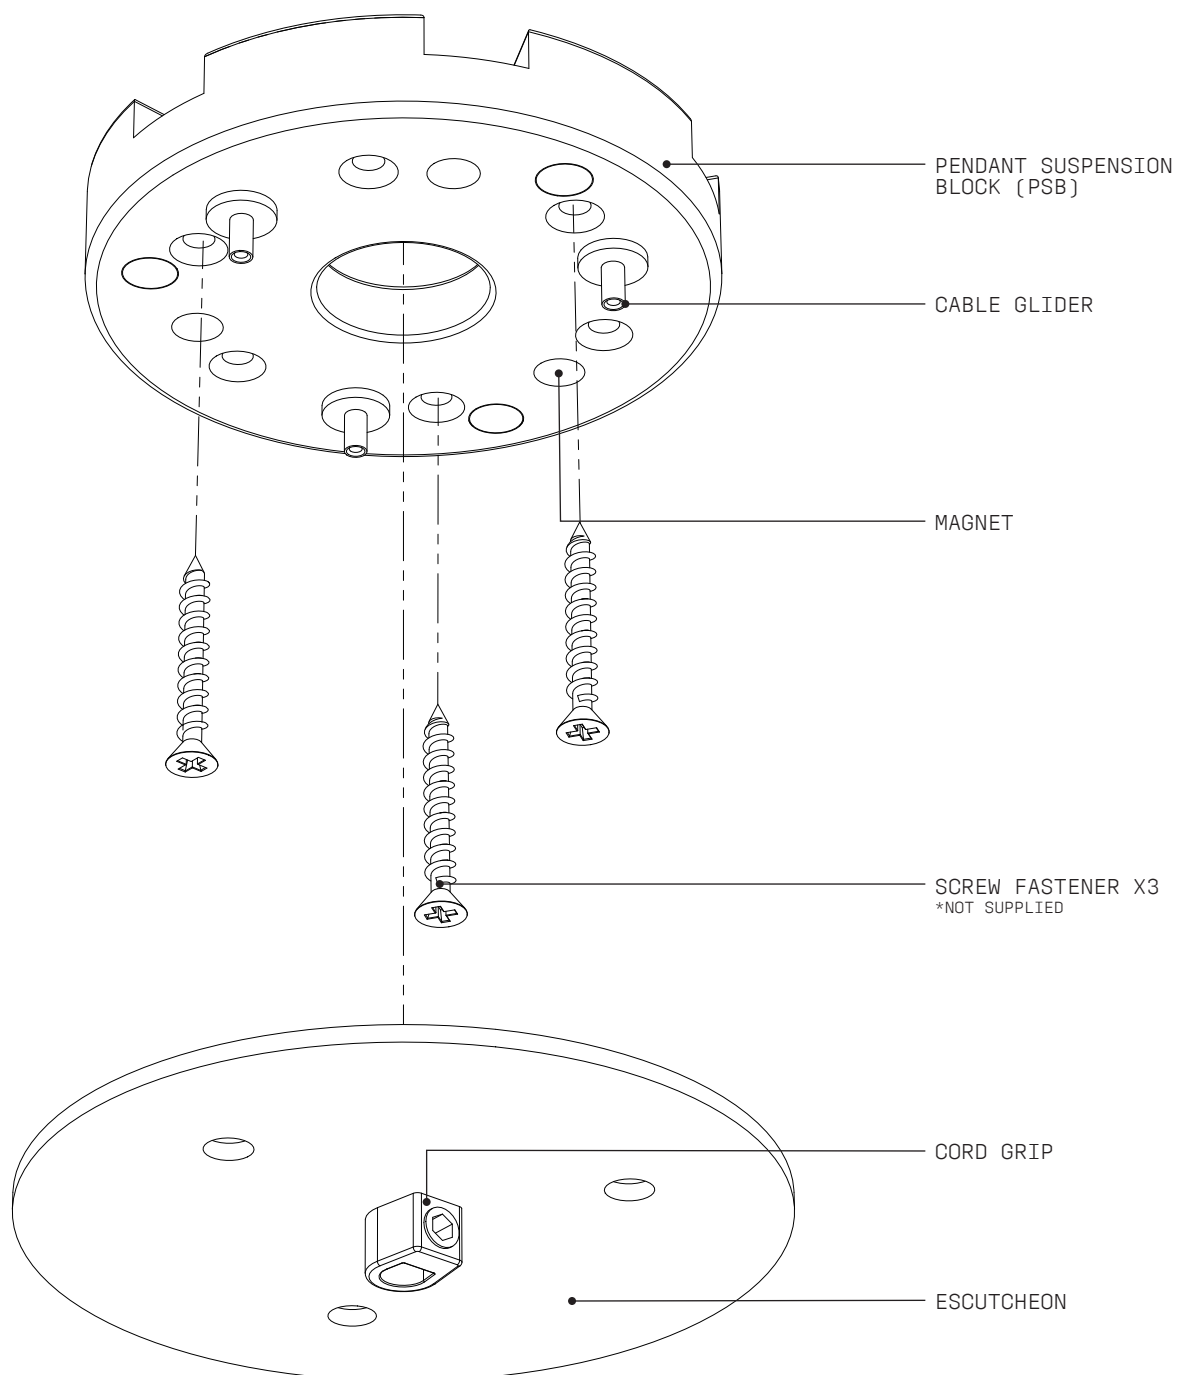

WARNING: SHOCK HAZARD

May result in serious injury or death.
ENSURE POWER IS OFF before commencing any work.



WARNING: ELECTRICAL

ALL ELECTRICAL connections must be made by a qualified electrician in accordance with the regulations and codes governing the area for which the CHRISTOPHER BOOTS Fixture is intended to be installed in. Failure to do so may result in serious harm or damage to property and life, at the owner's liability and expense.

CHRISTOPHER BOOTS will not be held liable for any damage caused from installation.



WARNING: STRUCTURAL

Ensure that the substrate is securely installed and is in accordance with local building regulations. Failure to do so may potentially result in serious harm or damage of property, at the owner's liability and expense.

CHRISTOPHER BOOTS will not be held liable for any damage caused from installation.




Refer to supplied WIRING DIAGRAM.

- 1 Wearing gloves, unpack the MEDIUM FLUSH CANOPY with care, ensuring not to scratch the surface of the ESCUTCHEON.


Separate the ESCUTCHEON from the PSB. These are connected via Magnets and can be pulled apart using moderate force.

- 2 Cut a Ø 120mm hole in the ceiling for the PSB.

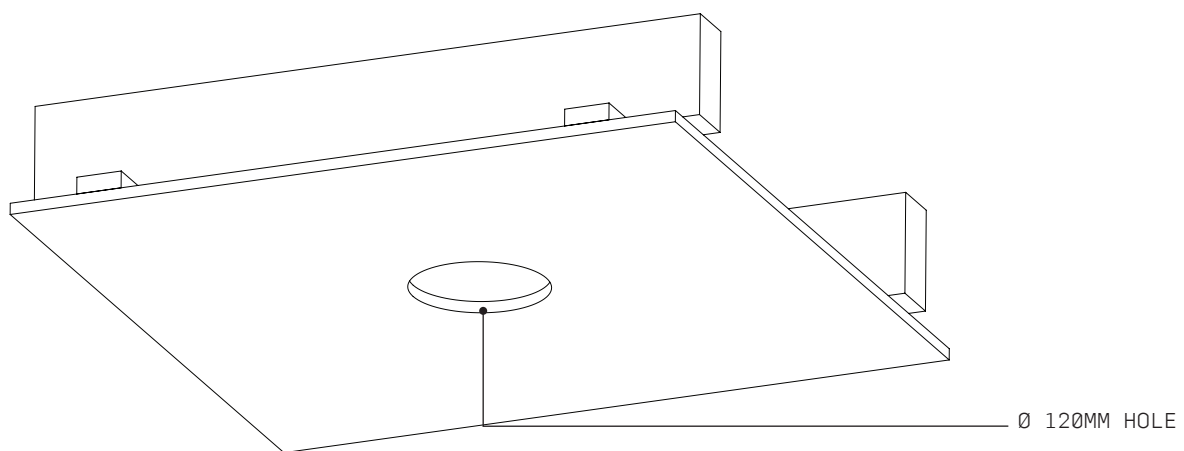


- 3 Installer to provide adequate load-bearing substrate*, utilising ceiling joists where additional support is required. The mounting face of the substrate* must be set back 20mm (23mm / 7/8" for North American installations) from the ceiling facade. For accurate placement of Cable Exits in the Substrate*, use the PSB as a guide or refer to the provided template at the end of this document.

***For North American installations substrate refers to JBox. Refer to page 9.**

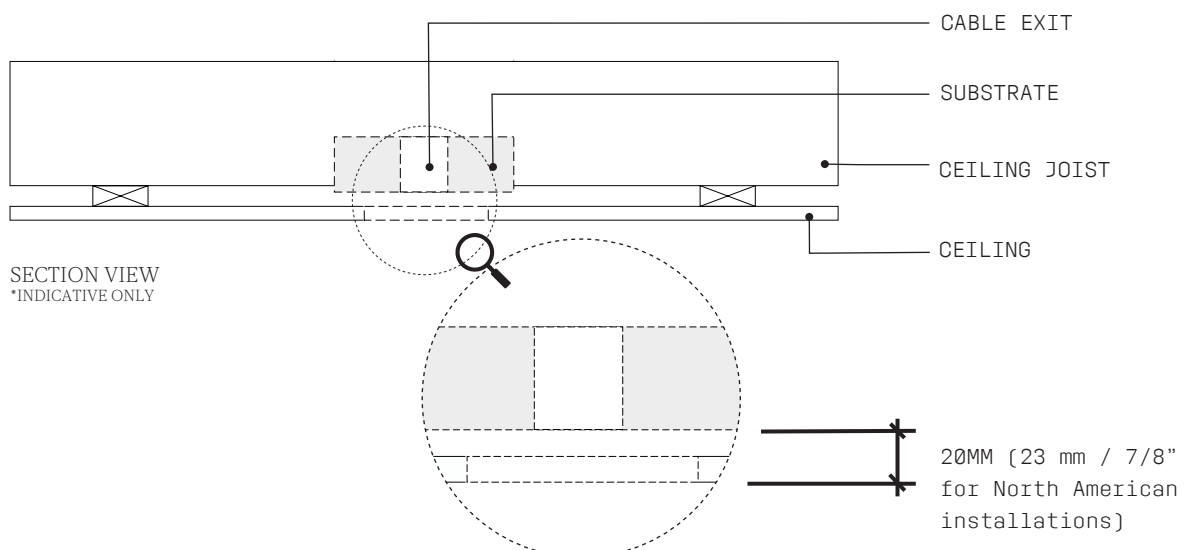


- 4 — Depending on the voltage of the pendant, prepare either the remotely located 24V Power Supply OR the 110-240V AC cable for connection to the pendant. Refer to supplied WIRING DIAGRAM →

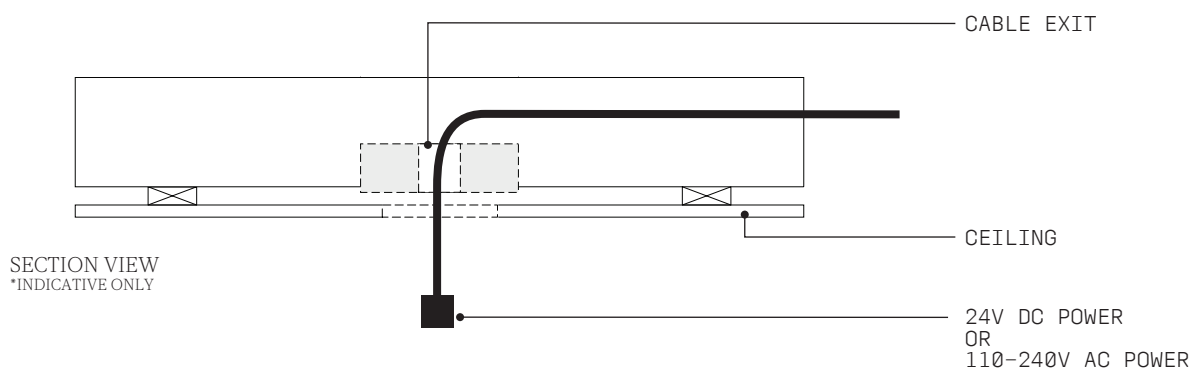


- 5 — Feed the 24V Power Supply cable OR the 120-240V AC Power cable through the central hole of the PSB and attach the PSB to Substrate* with appropriate Fasteners. Make sure to align the CABLE GLIDERS with the SUSPENSION WIRE EXIT HOLES.


*For North American installations substrate refers to JBox. Refer to page 9.

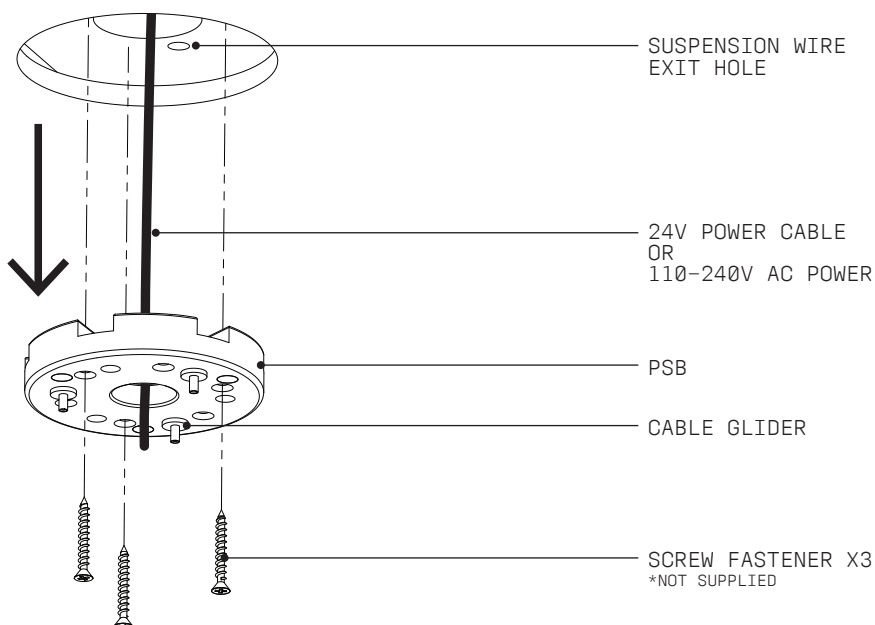

- 6 From the pendant feed the SUSPENSION WIRES through holes in the ESCUTCHEON as shown. Then also feed POWER CABLE from PENDANT through the CORD GRIP in the ESCUTCHEON.

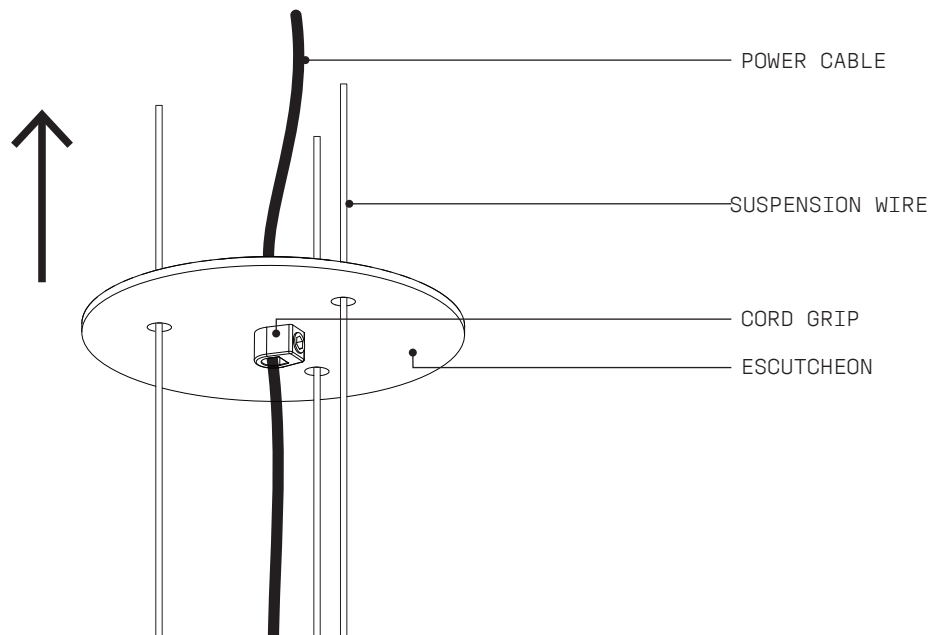


- 7 Connect the POWER CABLE from the PENDANT to the 24V DC POWER OR the 120-240V AC POWER. Refer to supplied WIRING DIAGRAM →

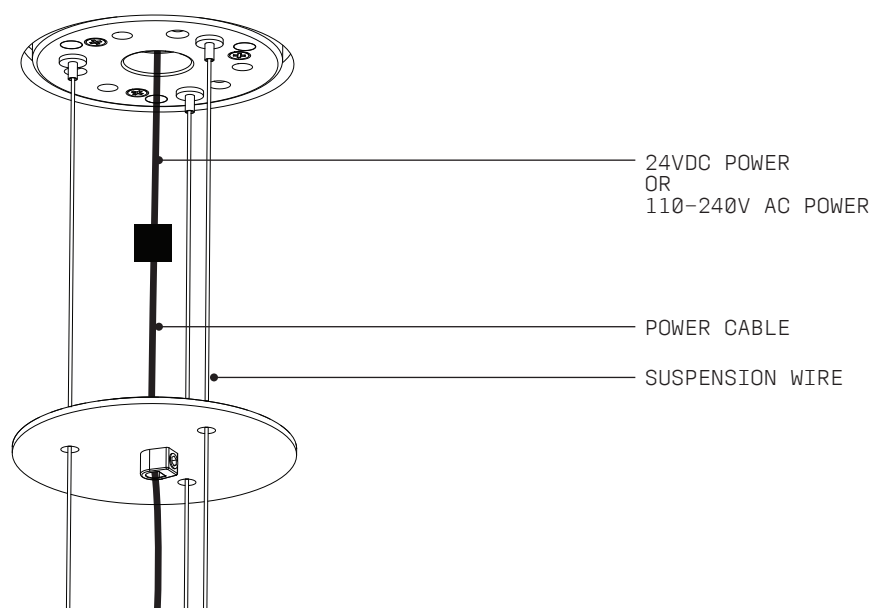


- 8 — Raise the PENDANT, feeding excess cable through the CABLE GLIDERS. Set into position by gently lowering the PENDANT.


While supporting the pendant make necessary adjustments; To lower, press the cable gliders gently allowing excess cable to slide downwards. To raise, gently feed the cables up through the cable gliders. When satisfied with arrangement, ensure that neither the PENDANT or SUSPENSION components are touching.

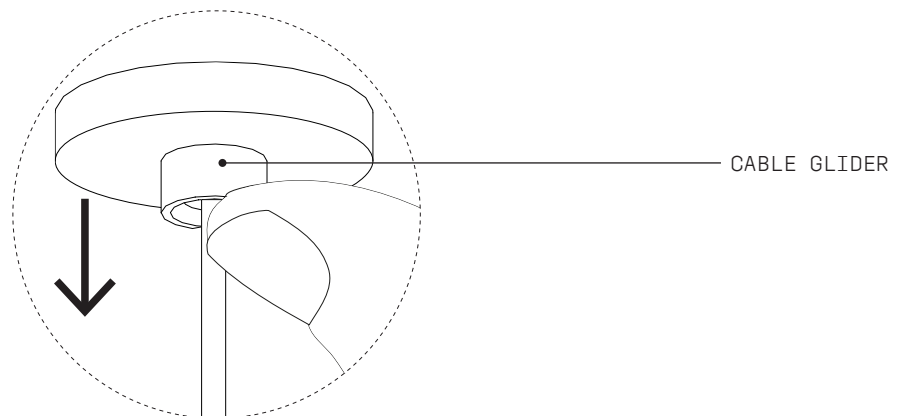

- 9 — Raise ESCUTCHEON to the ceiling carefully until the Magnets engage. Ensure no contact between ESCUTCHEON and CABLE GLIDERS, as this may release the suspension wires.

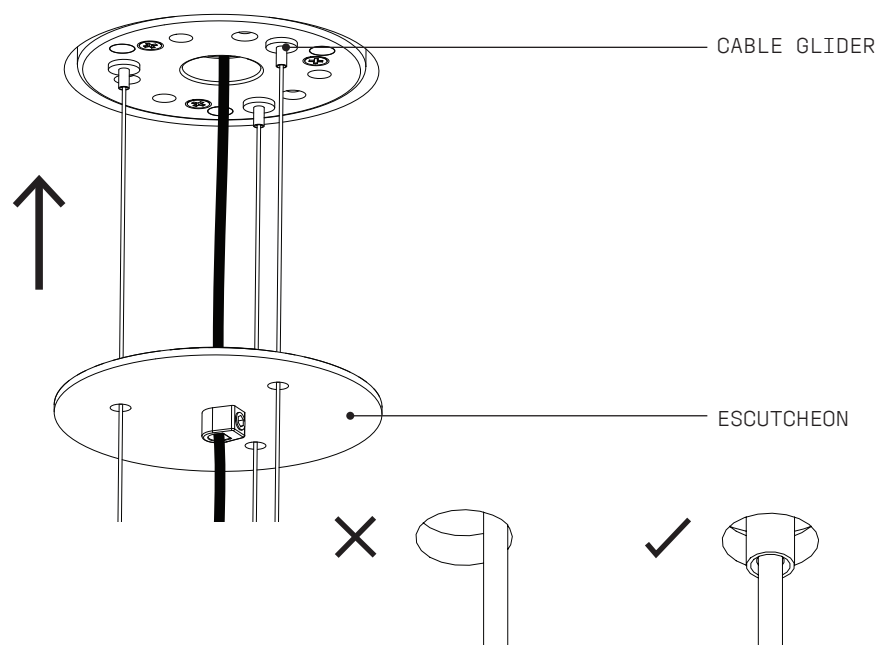


- 10 — With the ESCUTCHEON in place, ensure the CORD GRIP is adequately tightened on to the POWER CABLE and make any necessary final adjustments to the PENDANT.

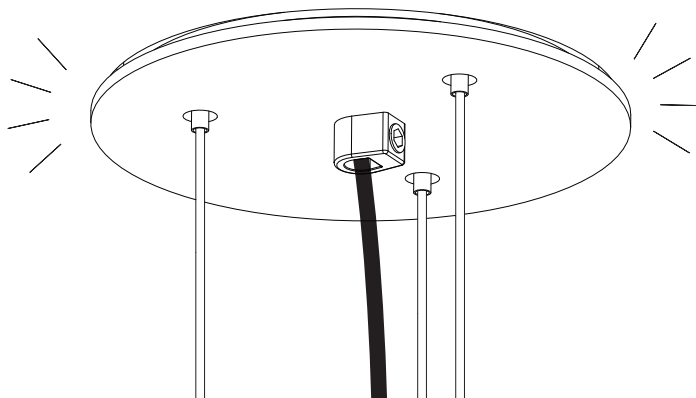

- 11 — Conduct a final visual assessment of both the canopy and fixture to ensure all parts have been properly fitted and secured. Once satisfied that everything is in working order, remove all remaining protective material which will now complete the installation process.

FINISH


DRILLING TEMPLATE

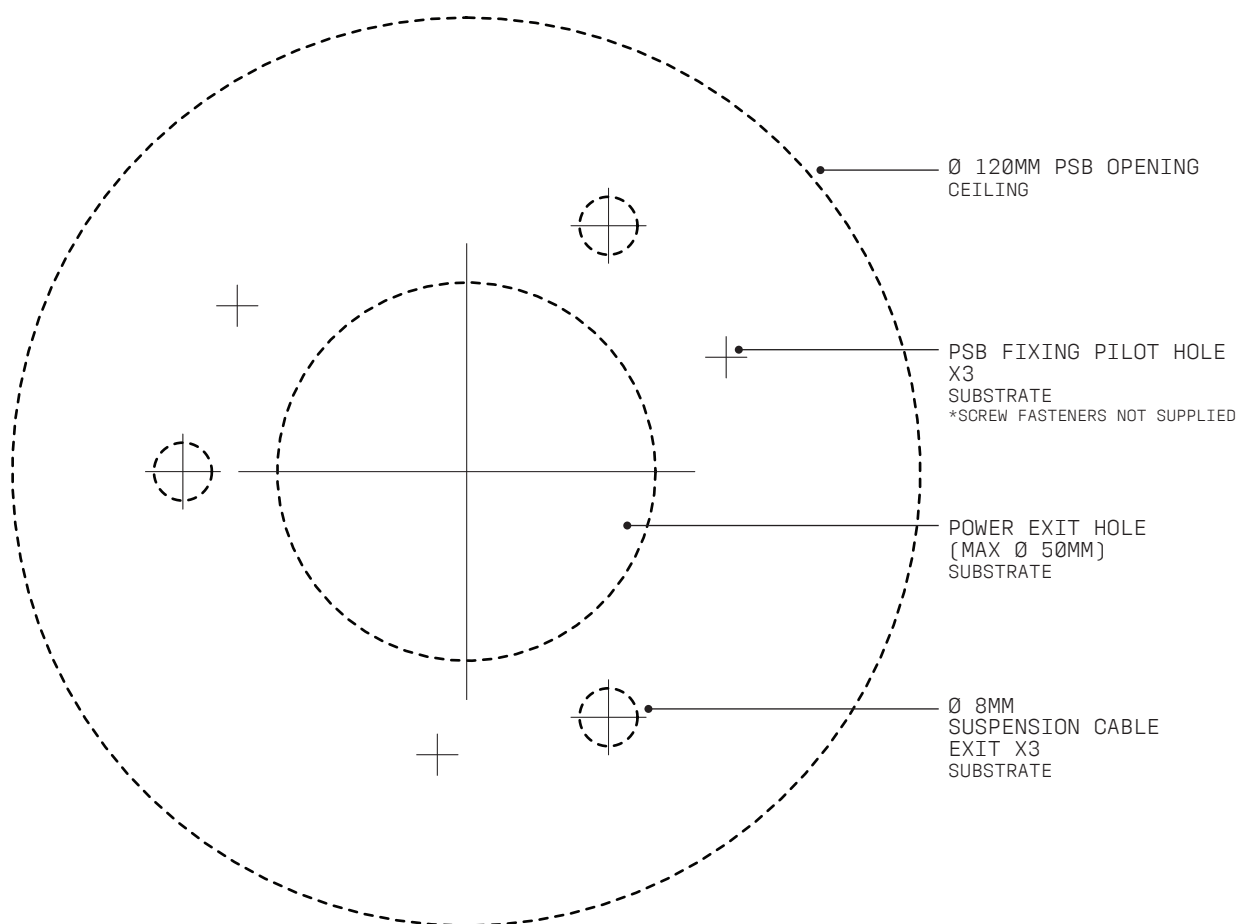

MEASURE BEFORE CUTTING AS TEMPLATE MAY NOT BE TO SCALE

J-BOX Adaptor Plate

North American Applications Only

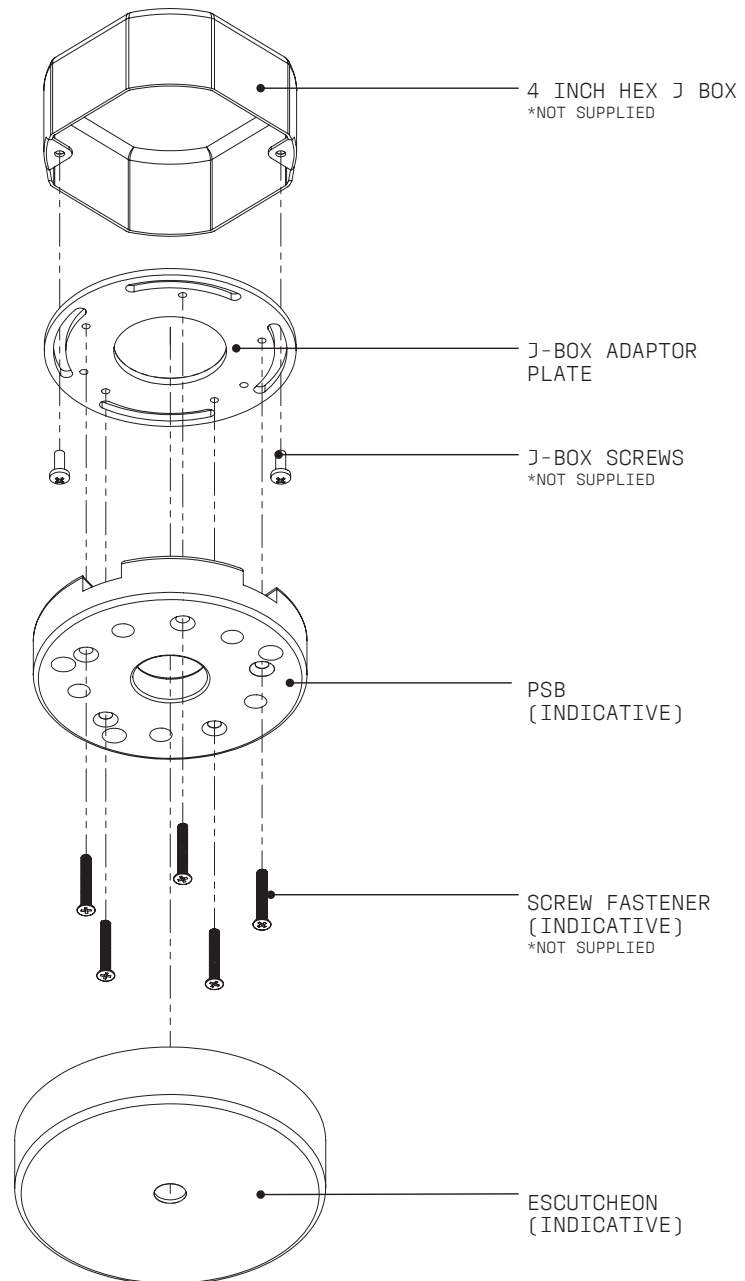

J-Box Adaptor Plate is located between PSB and standard 4" Hex J-Box as cover plate. Make appropriate electrical connections and secure J-Box adaptor plate onto J-Box using J-Box Screws. Refer to supplied WIRING DIAGRAM.

W

Use Screw Fasteners provided to securely fix PSB to J-Box Adaptor plate.