

TA60WD12LEDS

Low Voltage Electronic Power Supply



Efficiency	>85%
Power Factor	>0.95
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 65
Class	Class 2 Power Supply
Dimming	ELV Dimmable



RoHS



FEATURES


- No load technology, works with both Halogen & LED DC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- ELV Dimmable 0% - 100%
- Low profile, small compact design to fit in most enclosures

MODEL SPECIFICATIONS

Model Number	Input Voltage	Wattage	Input Current	Output Voltage	Load Type
TA60WD12LEDS	120V AC 50/60Hz	60W	0.5A	12V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
B5	67.5 x 33 x 21mm

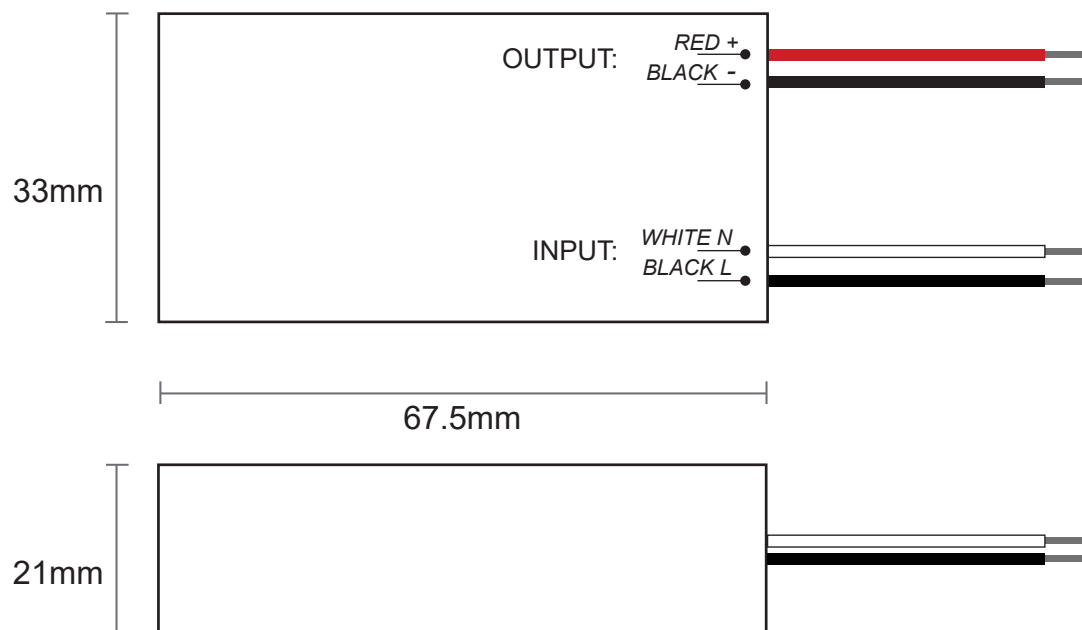

TU60WD12LEDS65B15

Low Voltage Electronic Power Supply



Efficiency	>85%
Power Factor	>0.95
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 65
Class	Class 2 Power Supply
Dimming	ELV Dimmable



RoHS



FEATURES

- No load technology, works with both Halogen & LED DC loads
- Isolated output power per NEC and UL safety requirements
- UL recognized/listed Class 2 power supply, meet UL 2108 requirements
- Auto-reset; Short circuit, Overload and Thermal protection
- Soft start
- ELV Dimmable 0% - 100%
- Low profile, small compact design to fit in most enclosures

MODEL SPECIFICATIONS

Model Number	Input Voltage	Wattage	Input Current	Output Voltage	Load Type
TU60WD12LEDS65B15	220V-240V AC 50/60Hz	60W	0.27A	12V DC	LED Strips, LED Bulbs, Incandescent & Halogen Bulbs

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
MB2	78 x 40 x 22.1mm

