


# INSTALLATION GUIDE

## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD

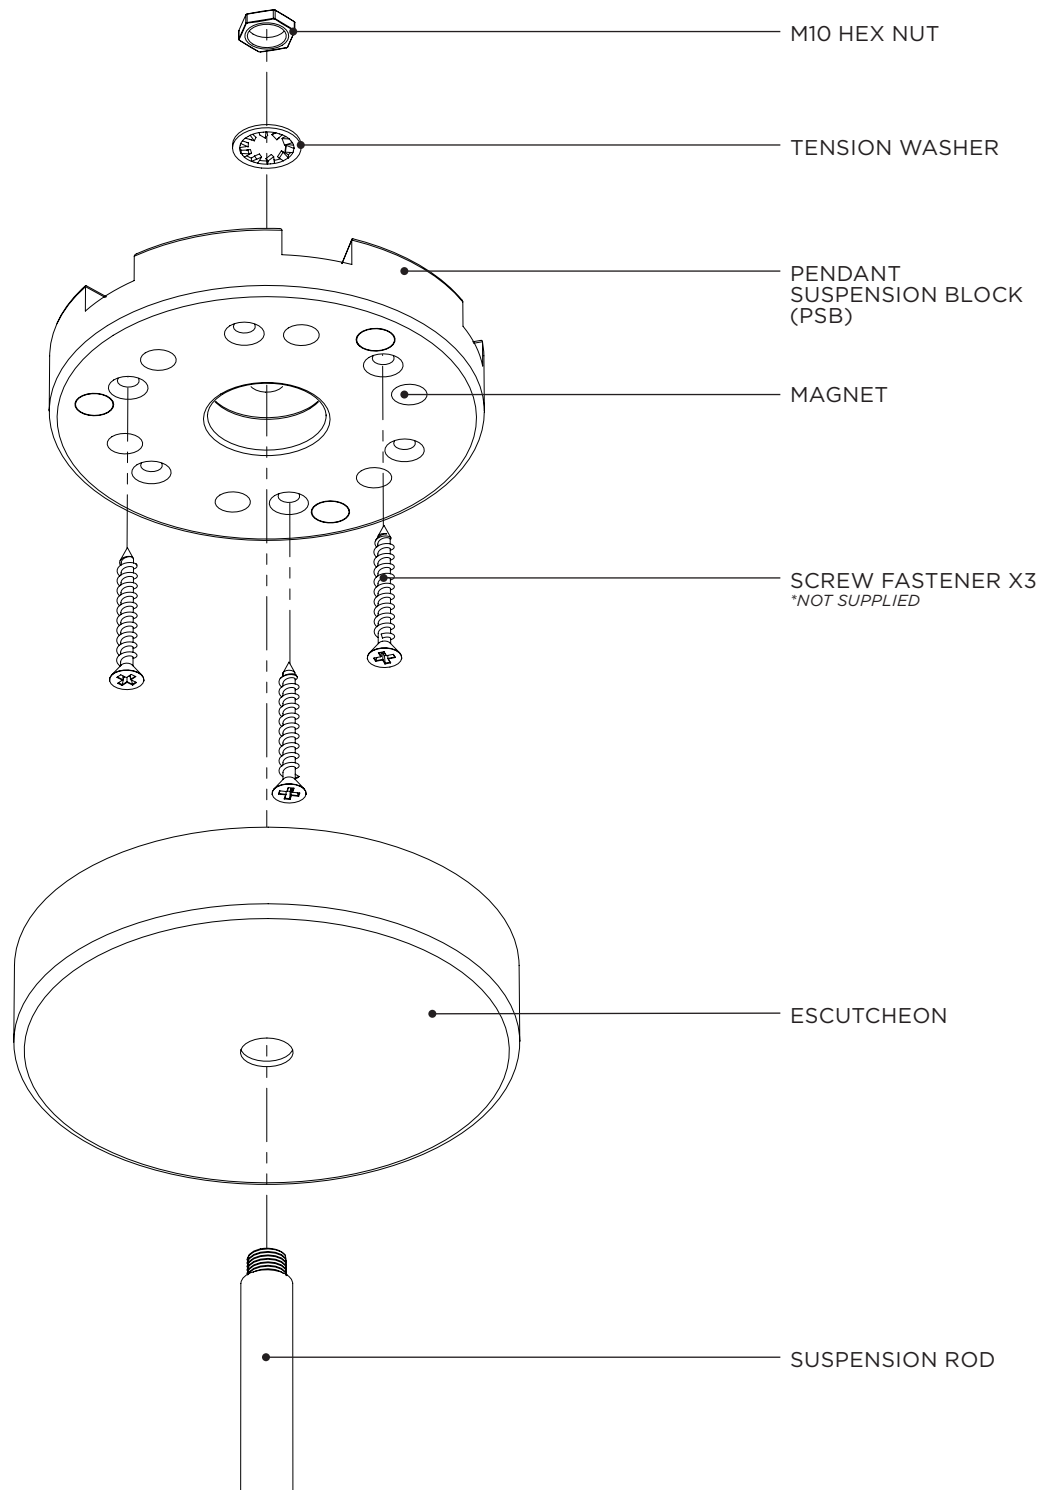

# INSTALLATION GUIDE

## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD



### **WARNING: SHOCK HAZARD**

May result in serious injury or death.  
ENSURE POWER IS OFF before commencing any work.



### **WARNING: ELECTRICAL**

ALL ELECTRICAL connections must be made by a qualified electrician in accordance with the regulations and codes governing the area for which the CHRISTOPHER BOOTS Fixture is intended to be installed in. Failure to do so may result in serious harm or damage to property and life, at the owner's liability and expense.

CHRISTOPHER BOOTS will not be held liable for any damage caused from installation.



### **WARNING: STRUCTURAL**

Ensure that the substrate is securely installed and is in accordance with local building regulations. Failure to do so may potentially result in serious harm or damage of property, at the owner's liability and expense.

CHRISTOPHER BOOTS will not be held liable for any damage caused from installation.



Refer to supplied WIRING DIAGRAM.

# INSTALLATION GUIDE


## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD


- 1 Wearing gloves, unpack the MEDIUM SURFACE CANOPY with care, ensuring not to scratch the surface of the ESCUTCHEON.

Separate the ESCUTCHEON from the PSB. These are connected via Magnets and can be pulled apart using moderate force.

- 2 Cut a Ø 50mm hole in the ceiling for the PSB.

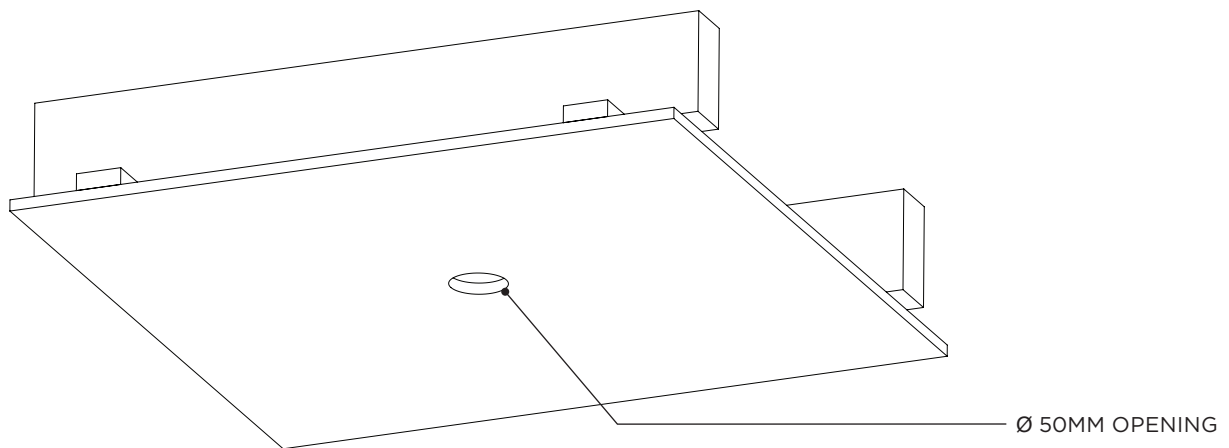

- 3 Installer to provide adequate load-bearing substrate, utilising ceiling joist where additional support is required.

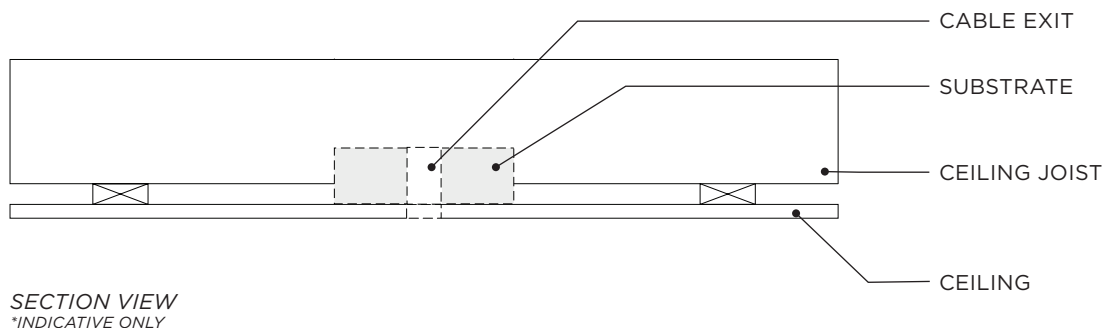


# INSTALLATION GUIDE

## CANOPY - ROUND SURFACE MEDIUM


ROD SUSPENSION  
RSM.ROD

- 4 Depending on the voltage of the Pendant, prepare either the 24V DC Power Supply OR the 120-240V AC Power for connection to the Pendant. Refer to supplied WIRING DIAGRAM.→

W

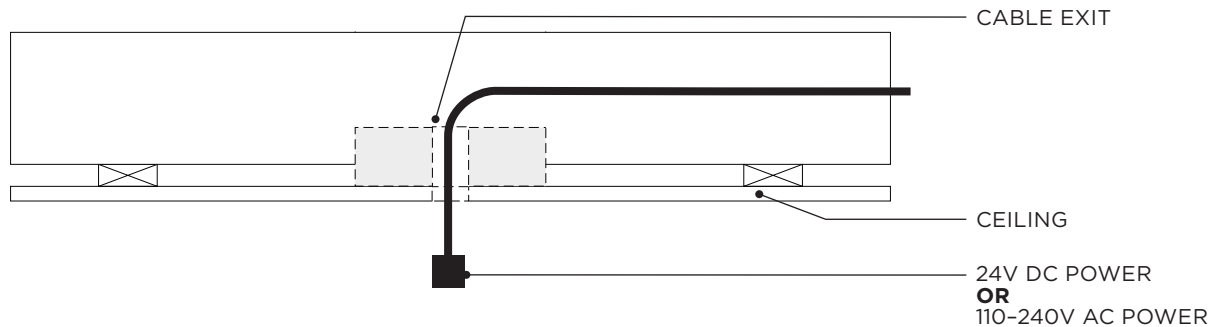

- 5 From the pendant, feed the POWER CABLE & SUSPENSION ROD through the central hole in the ESCUTCHEON as shown. Take care ensuring not to scratch the SUSPENSION ROD.

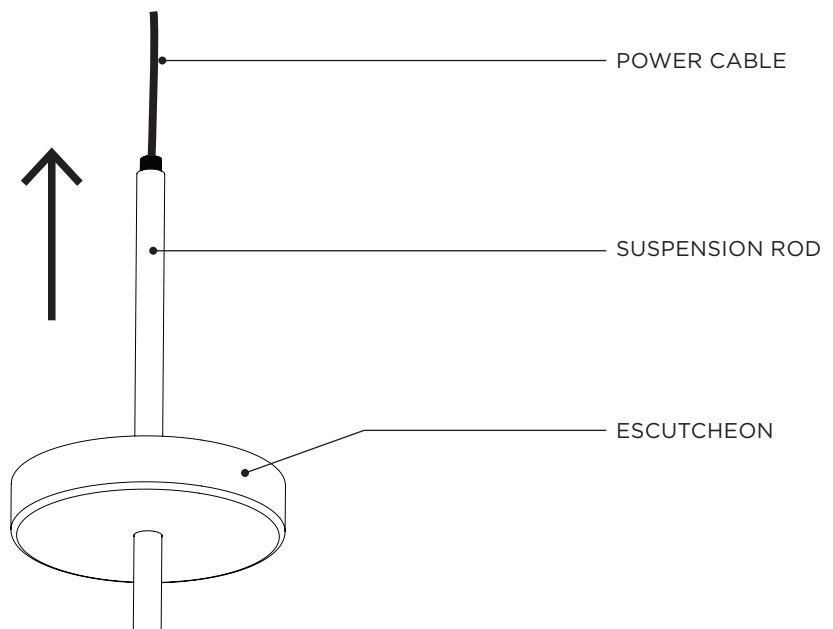


# INSTALLATION GUIDE


## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD

- 6** Feed the POWER CABLE through the PSB and the provided TENSION WASHER & M10 HEX NUT. Secure the components tightly to the threaded rod, finishing with the M10 HEX NUT.

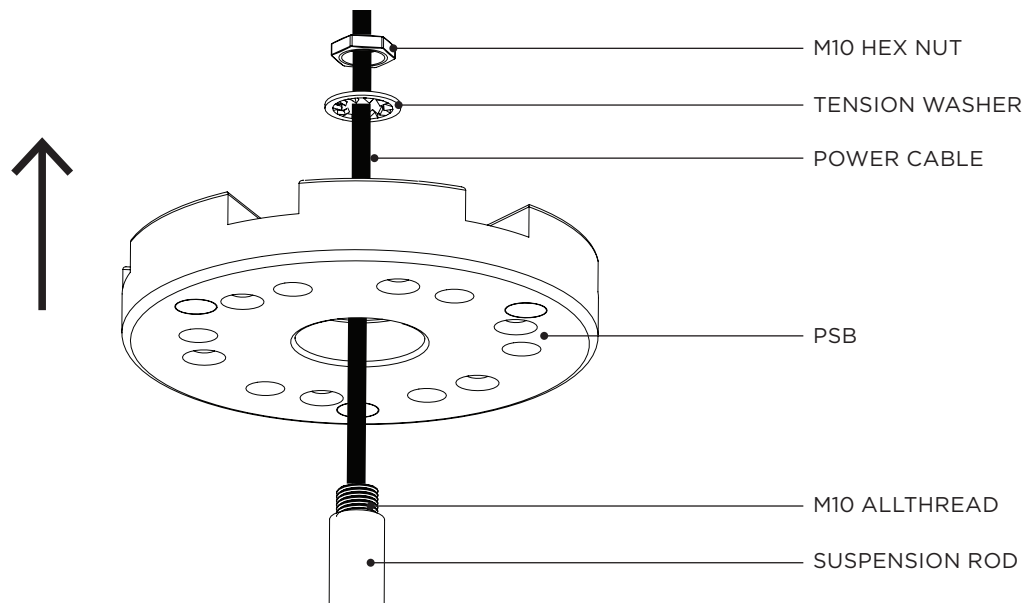

- 7** Connect the 24V DC OR 110-240V AC POWER to the POWER CABLE. Refer to supplied WIRING DIAGRAM →

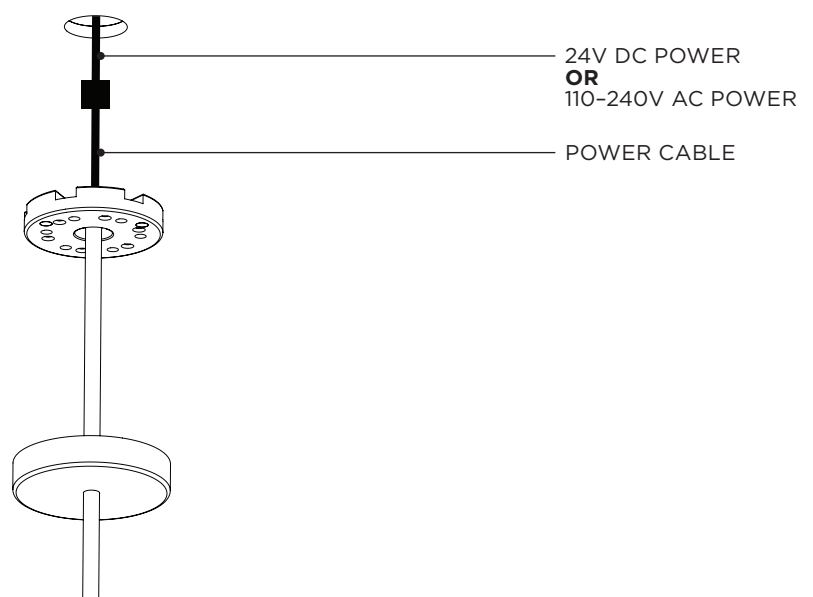


# INSTALLATION GUIDE


## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD

- 8** Attach the PSB to Substrate with appropriate Fasteners.

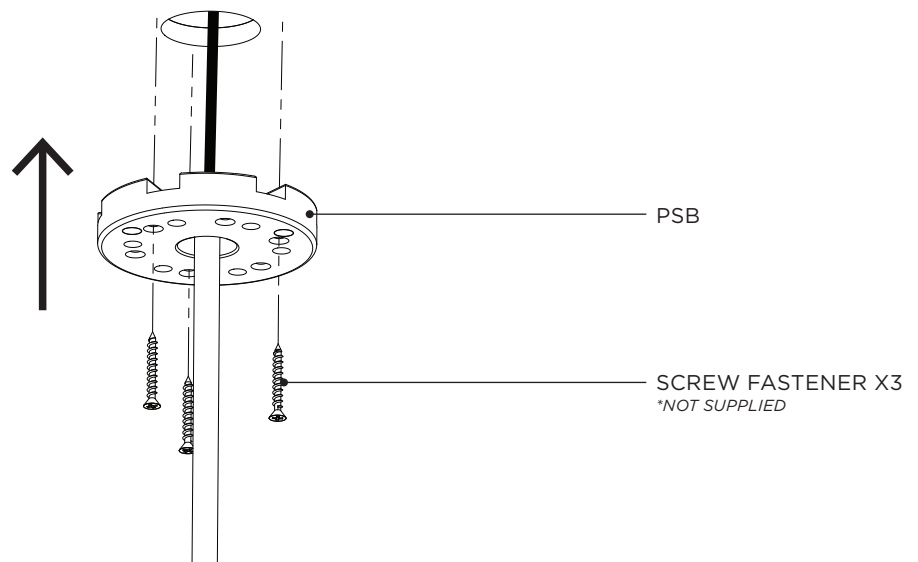

- 9** Carefully raise ESCUTCHEON to the ceiling until the Magnets engage. Ensure not to damage the SUSPENSION ROD as the ESCUTCHEON is being raised.

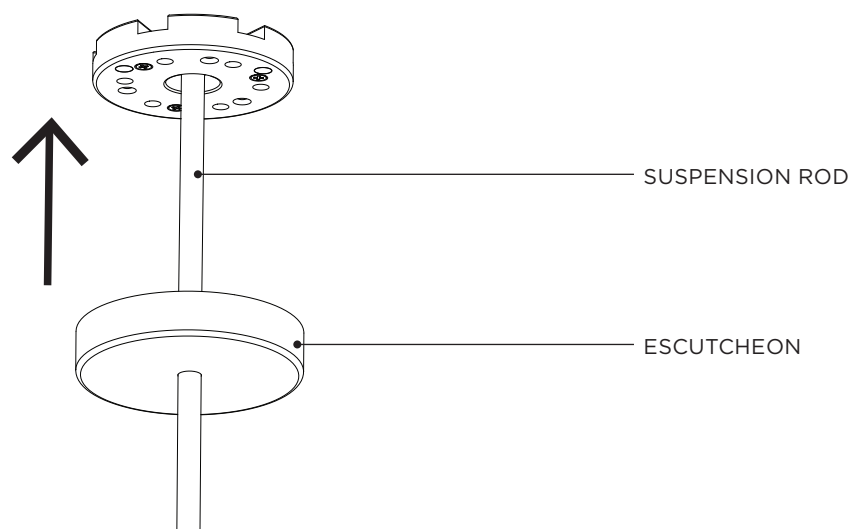


# INSTALLATION GUIDE

## CANOPY - ROUND SURFACE MEDIUM

ROD SUSPENSION  
RSM.ROD

- 10 Conduct a final visual assessment of both the canopy and fixture to ensure all parts have been properly fitted and secured. Once satisfied that everything is in working order, remove all remaining protective material which will now complete the installation process.

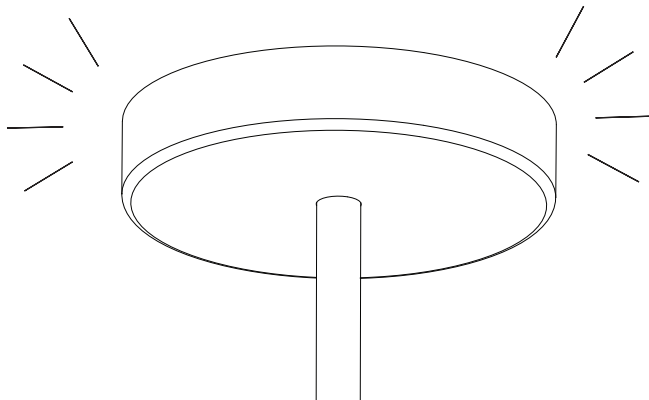

FINISH