



VOLANT 55 & 66

CHANDELIER

Volant is a modern chandelier that’s almost akin to a kinetic sculpture. A static lamp with a mystifying ability to appear in motion. Solid brass bars are home to textured, tubular formed glass elements, angled to give the impression of floating objects revolving around each other. The result is an elegant equilibrium that’s at once enthralling yet soothing.



AVAILABLE FINISHES



TECHNICAL

MATERIAL	TREATED BRASS, GLASS			LED LIFESPAN	50,000 HRS		
FINISH	ALL BRASS FRAMES ARE BRUSHED AND TREATED TO ACHIEVE THE AVAILABLE FINISH OPTIONS, THEN SEALED TO PREVENT ACCELERATED AGING.			IP RATING	IP20 - FOR INDOOR USE ONLY		
				CERTIFICATION	AU/NZ EU	AS/NZS 60598.1, 60598.2.1 EN 60598.1, 60598.2.1	
LAMPING	SELV 60V (EXTERNAL DRIVER SUPPLIED) VC555 - 22W, 3050-3550 LM, 2700K VC666 - 26.4W, 3660-4020 LM, 2700K WATTAGE AND LUMEN OUTPUT WILL VARY SLIGHTLY DEPENDING ON CONSTANT CURRENT OUTPUT.			US/CAN	ETL/UL 1598, CSA C22.2#250.0		
				CANOPY	VARIOUS - SEE CANOPY OPTIONS ON FOLLOWING PAGE		
DIMMING OPTIONS	220-240V REGION PHASE - DIMMING RANGE 5 - 100% DALI - DIMMING RANGE 1 - 100%			SKU CODES	EG. VC666.G-FLU.BR-BRZ VOLANT 666 CHANDELIER IN FLUTED CLEAR GLASS WITH A BRONZED BRASS FRAME		
					VC555.G-XXX.BR-XXX	VOLANT 555 CHANDELIER	
		VC666.G-XXX.BR-XXX	VOLANT 666 CHANDELIER				
	110-120V REGION PHASE - DIMMING RANGE 3 - 100% DALI - DIMMING RANGE 0.1 - 100%			FINISHES			
				GLASS	FROSTED BLACK (G-FBL) FLUTED (G-FLU) FROSTED FLUTED (G-FFL)		
	DRIVER SIZE 220 -240V	ALL US AND CANADIAN ORDERS COME SUPPLIED WITH 120V COMPONENTRY CERTIFIED FOR USE IN THESE REGIONS.			FRAME	BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ)	
FOR OPTIMAL DIMMING PERFORMANCE WE RECOMMEND SOURCING A DIMMER CAPABLE OF SETTING THE DIMMING RANGE OF THE FIXTURE.			PRODUCT WEIGHT	VC555	35KG / 77LB		
				VC666	42KG / 93LB		
PHASE / TRIAC ALL VC 55 & 66 - L101 X W51 X H29 / L4" X W2" X H1.1"			PACKAGING DIMENSIONS	VC555	3 X L 1920 W 370 H 190 / L 75.6" W 14.6" H 10"		
				VC666	1 X L 500 W 500 H 250 / L 19.7" W 19.7" H 10"		
110-120V	PHASE / TRIAC ALL VC 55 & 66 - L75 X W35 X H26.5 / L3" X W1.4" X H1"			PACKAGING WEIGHT	VC555	2 X 16KG / 35LB, 1 X 9KG / 20LB, 1 X 3KG / 6.6LB	
					VC666	3 X 16.5KG / 36.5LB, 1 X 3KG / 6.6LB	
	DALI ALL VC 55 & 66 - L75 X W35 X H26.5 / L3" X W1.4" X H1"						

DIMENSIONS

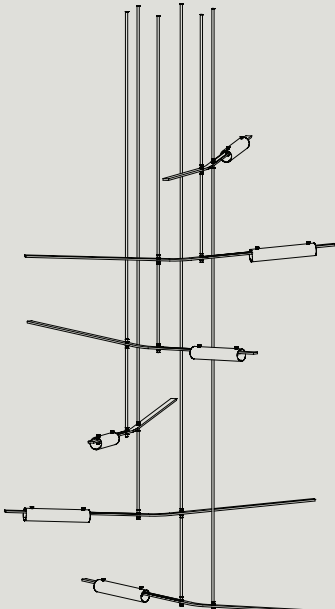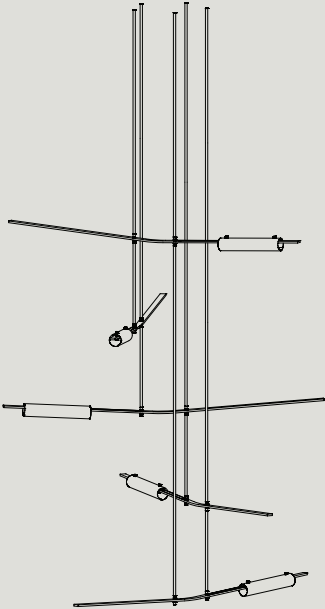

VC555
L 1790 W 1720 H 2090
L 70.5” W 67.7” H 82.3”
MIN DROP HEIGHT - H 2590 / 102”

VC666
L 1790 W 1790 H 2580
L 70.5” W 70.5” H 101.6”
MIN DROP HEIGHT - H 3080 / 121.3”

*HANG HEIGHT NEEDS TO BE CONFIRMED PRIOR TO PRODUCTION.
*POWER ACCESS POINT REQUIRED AT CENTRE OF CEILING CANOPY.

AVAILABLE CANOPIES

ALL ROSS GARDAM CEILING MOUNTED FIXTURES COME SUPPLIED WITH A CEILING CANOPY UNLESS OTHERWISE SPECIFIED. EACH CANOPY INCLUDES ELECTRICAL CONNECTORS, EARTH WIRE AND CABLE RETENTION TO CONNECT TO MAINS POWER. THE BELOW IMAGES DEPICT THE CEILING CANOPIES AVAILABLE WITH EACH FIXTURE TYPE. IF NO CANOPY IS SELECTED THE CIRCULAR CANOPY WILL BE SUPPLIED.

CIRCULAR



CIRCULAR
FIXED CANOPY
CAN.VC.CIR.X-XXX

Ø600 X 37MM / 23.6" X 1.5"

DRIVER HOUSED IN CANOPY



CIRCULAR
FIXED SWIVEL CANOPY
CAN.VC.CIR.SW.X-XXX

Ø600 X 37MM / 23.6" X 1.5"

DRIVER HOUSED IN CANOPY

INDIVIDUAL CANOPY



SLIM
Ø14MM FIXED CANOPY
CAN.SL.F14.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



SLIM
Ø14MM FIXED SWIVEL CANOPY
CAN.SL.F14.SW.X-XXX

Ø120 X 7MM / 4.7" X 0.3"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED CANOPY
CAN.PK.F14.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING



PUCK
Ø14MM FIXED SWIVEL CANOPY
CAN.PK.F14.SW.X-XXX

Ø50 X 65MM / 2" X 2.6"

DRIVER HOUSED IN CEILING

TECHNICAL

MATERIAL	TREATED BRASS / POWDER COATED STEEL
	<div><div> BRUSHED BRASS</div><div> BLACKENED BRASS</div><div> BRONZED BRASS</div><div> WHITE POWDERCOATED</div></div>
CANOPY FINISH	BRUSHED BRASS (BR-NAT) BLACKENED BRASS (BR-BLK) BRONZED BRASS (BR-BRZ) POWDERCOATED WHITE (C-WHT) (CIRCULAR CANOPIES ONLY)
SKU CODES	EG. CAN.VC.CIR.SW.BR-NAT = CIRCULAR FIXED SWIVEL CANOPY IN BRUSHED BRASS FINISH